



400 Line 1 Door Freezer (Stainless steel) R290



110815 (Z4FSF4)

1-door freezer 400lt, -15-24°C
(R290), stainless steel

Short Form Specification

Item No.

Exterior in stainless steel. Interior in white High Impact Polystyrene with rounded corners and 45mm thick insulation. Right hinged full door with lock and heated frame, reversible on-site. Built-in refrigeration unit; manual defrost; digital control and temperature display; multiple evaporating grids. For ambient temperatures up to 38 °C. HCFC, CFC and HFC free insulation and R290 refrigerant gas. With 2 front feet and 2 back wheels. Supplied with n. 4 evaporating grids.

ITEM # _____
MODEL # _____
NAME # _____
SIS # _____
AIA # _____

Main Features

- Digital control panel allowing the easy and precise setting and control of the internal temperature.
- Shelf runners are thermoformed and are incorporated in the internal structure to be easily cleanable.
- CFC and HCFC free (highly ecological refrigerant type: R290).
- Whole interior cell with rounded corners is white thermoformed polystyrene, which is impact resistant.
- Model requires only 1 phase 230V supply and can be plugged straight into an existing power socket.
- Very quiet operation.
- No joints whatsoever to eliminate dirt traps.
- Simple refrigeration system easily accessible from the rear of the units.
- Suitable for use in ambient temperatures of up to 38 °C.
- Connectivity ready for real time access to connected appliances from remote and data monitoring (requires optional accessory).

Construction

- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- All models in range are finished in top quality materials to aid durability.

Optional Accessories

• Kit of wheels for 400lt refrigerators	PNC 880348	<input type="checkbox"/>
• Pvc container with false bottom for 400 lt cabinets	PNC 881072	<input type="checkbox"/>


APPROVAL: _____

Part of




Electrolux
Professional
Group

Zanussi Professional
www.zanussiprofessional.com

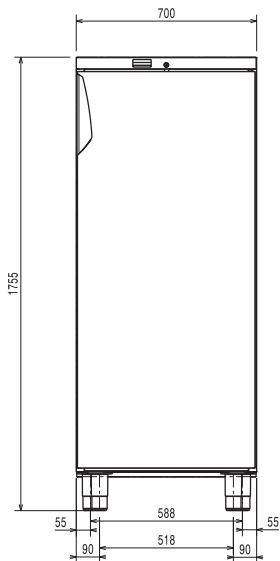


Front

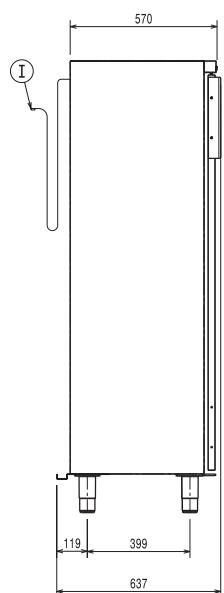

Side

EI = Electrical inlet (power)

Top



Electric

Supply voltage: 110815 (Z4FSF4)	220-240 V/1 ph/50 Hz
Electrical power max.: 110815 (Z4FSF4)	0.37 kW

Key Information:

Gross capacity:	400 lt
Door hinges:	Right Side
External dimensions, Width:	700 mm
External dimensions, Depth with Doors Open:	1310 mm
External dimensions, Height:	1755 mm
Number and type of grids (included):	- 600x400
Type of external material:	Stainless Steel
External door material:	Stainless Steel

Refrigeration Data

Control type:	Digital
Compressor power:	3/4 hp
Refrigeration power at evaporation temperature:	-23.3 °C
Operating temperature min.:	-24 °C
Operating temperature max.:	-15 °C
Operating mode:	Static
Cooling unit:	Built-In
Defrost type:	Manual

Sustainability

Noise level:	56 dBA
Refrigerant type:	R290
Refrigeration power:	644 W
Refrigerant weight:	110 g